

ASME B18.9-2012
(Revision of ASME B18.9-2007)

Plow Bolts

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

INTENTIONALLY LEFT BLANK

ASME B18.9-2012
(Revision of ASME B18.9-2007)

Plow Bolts

AN AMERICAN NATIONAL STANDARD



**The American Society of
Mechanical Engineers**

Three Park Avenue • New York, NY • 10016 USA

Date of Issuance: July 25, 2012

This Standard will be revised when the Society approves the issuance of a new edition.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this Standard. Periodically certain actions of the ASME B18 Committee may be published as Cases. Cases and interpretations are published on the ASME Web site under the Committee Pages at <http://cstools.asme.org/> as they are issued.

Errata to codes and standards may be posted on the ASME Web site under the Committee Pages to provide corrections to incorrectly published items, or to correct typographical or grammatical errors in codes and standards. Such errata shall be used on the date posted.

The Committee Pages can be found at <http://cstools.asme.org/>. There is an option available to automatically receive an e-mail notification when errata are posted to a particular code or standard. This option can be found on the appropriate Committee Page after selecting “Errata” in the “Publication Information” section.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not “approve,” “rate,” or “endorse” any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assumes any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Three Park Avenue, New York, NY 10016-5990

Copyright © 2012 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.

CONTENTS

Foreword	iv
Committee Roster	vi
Correspondence With the B18 Committee	vii
1 Introduction	1
2 General Data	1
Tables	
1 Dimensions of No. 3 Head Plow Bolts (Round, Countersunk, Square Neck)	3
2 Dimensions of No. 7 Head Plow Bolts (Round, Countersunk, Reverse Key)	4
3 Dimensions of No. 4 Repair Head Plow Bolts (Square Head, Countersunk)	5
4 Dimensions of No. 6 Repair Head Plow Bolts (Round, Countersunk, Heavy Key)	6
5 Clipped Head Plow Bolt	6
6 Elliptical Head Plow Bolt	7
7 Minimum Thread Lengths of Plow Bolts ($2D + 0.25$)	8
8 Tolerance on Length	8
9 Plus Tolerance on Thread Length	8
Nonmandatory Appendix	
A Dimensions of Obsolete Plow Bolts	9

FOREWORD

ASME Standards Committee B18 for the Standardization of Bolts, Nuts, Rivets, Screws, Washers, and Similar Fasteners (formerly American National Standards Committee B18) was organized in March 1992 as Sectional Committee B18 under the aegis of the American Engineering Standards Committee [later the American Standards Association (ASA), the United States of America Standards Institute (USASI), and, as of October 6, 1969, the American National Standards Institute (ANSI)] with the Society of Automotive Engineers (SAE) and The American Society of Mechanical Engineers (ASME) as joint sponsors. Subcommittees 2, 5, and 6 (later designated as Subcommittee 9) were subsequently established and charged with the responsibilities for the technical content of standards for external drive bolts and nuts, round unslotted head bolts, and plow bolts, respectively.

The National Association of Farm Equipment Manufacturers (NAFEM) had previously appointed a committee to standardize plow bolts. This committee was at work simplifying the list of types then in use. Its first recommendation reduced the total number to seven types representing 182 varieties. These were the No. 1 Key Head; No. 2 Round Countersunk; No. 3 Round Head, Square Neck; No. 4 Square Head; No. 5 Large Round Countersunk; No. 6 Round Head, Heavy Key; and No. 7 Round Head, Reverse Key. Later, at a general conference called by the Division of Simplified Practice, U.S. Department of Commerce, the NAFEM Committee recommended four types of plow bolts representing 42 varieties. These were the Nos. 3, 4, 6, and 7 types. Following the Washington conference in February 1924, NAFEM appointed one of its members to represent it on Subcommittee 6. The recommendations of the NAFEM Committee were carefully reviewed by Subcommittee 6, and Standard B18f-1928 was prepared and subsequently issued.

Many of the nonstandard types and variations of standard types continued to be used, one bolt manufacturer alone reporting production of 17 basic types with 54 variations in the head proportions of the No. 3 type, exclusive of diameter and length.

In 1945, the Department of Commerce Simplified Practice Committee found that the Nos. 1, 2, 3, 4, and 7 bolts were the most widely used, while the No. 6 bolt had little use. No dimensional standards existed for the Nos. 1 and 2. These findings were substantiated by a comprehensive survey conducted by the American Institute of Bolt, Nut, and Rivet Manufacturers (AIBNRM), who also found a limited requirement for the No. 8 head.

In June 1947, Subcommittee 6 was reorganized to study the problem and revise the Plow Bolt Standard. Sentiment in the industry demanded simplification, so the subcommittee revised the dimensions of the No. 3 Round Head, Square Neck bolt and recommended its adoption as the standard Regular Head Plow Bolt for new designs in place of the Nos. 4, 6, and 7 Regular Head Bolts. They concluded that the No. 1 Protruding Key Head and the No. 8 Concave Head were special with each company, particularly the latter, where the head tops have the contours required by special usage. Use of the No. 1 was not considered necessary, as standard keys are available, and the No. 2 Countersunk Head was not included since it is available as a machine bolt.

The standard was considered in the light of expanding use of medium carbon and alloy steels and in railroad equipment, deep soil plows, cleaning machinery, tractors, corn cutters, manure spreaders, hay rakes, and implements of widely varied types.

In the fall of 1947, a letter and ballot were sent out to all known manufacturers and users of plow bolts to obtain comments on the proposed dimensions of the No. 3 head and a proposal to make it the sole standard for new designs. The comments received from over 80% of the circulation indicated favor of the proposals. The greatest demand of the dissenters was for inclusion of the No. 7 head. As a result, the committee further revised the No. 3 and revised and restored the No. 7 head. It was decided to place the No. 4 regular head in an appendix, since the Nos. 3 and 7 heads could be used in most cases. The same action was taken for the No. 6 regular head. The intent was to emphasize the use of Nos. 3 and 7 regular heads for new designs. The Nos. 3, 4, 6, and 7 repair heads were brought up to date and retained in the standard.

Maximum and minimum limits were set for the square depth of the No. 3, and the "wash out" of the corners and bottoms of squares and keys were controlled by established radii. Without changing feed, head angles, or head heights, and without changing head proportions, the relationship of the feed to the minimum head diameter was so set up that some feed was always available for grinding when the head diameter was at the minimum. The maximum head diameter was adjusted so that trimming the head would be optional if the feed was at the maximum and trimming was not specifically required.

Elimination of the $\frac{9}{16}$ in. size was considered, but it was decided to include it with the comment, "This size is not recommended."

Existing American Iron and Steel Institute (AISI) plus and minus tolerances on hot rolled bar required the addition of a plus tolerance to the nominal bolt diameter in setting the maximum body diameter for the $\frac{9}{16}$ in. and larger sizes.

Thread lengths were limited by a maximum as well as a minimum. Due to wear, plow bolts function partly in shear, and it was necessary to limit the number of threads in bearing.

The specification of one key width on all sizes of the No. 7 head is indefensible from the standpoint of both usage and manufacture. To rectify this would cause tremendous confusion, since new bolts might not fit in the old holes and vice versa. If the corrected head was given a new head number, this would also be confusing, since it would be hard to distinguish from the No. 7 head now in production and use. As a result, no solution was found practicable at this time.

A revised draft was submitted to the industry for review, and every known manufacturer of plow bolts was invited to attend a meeting of the subcommittee in September 1948. Various objections were again reviewed, and this proposal, containing some refinements, was unanimously approved by the subcommittee and submitted for ballot in June 1949. Following approval of the sectional committee and sponsor organizations, this proposal was presented to ASA for approval and designation as an American Standard. This was granted on March 22, 1950.

A revision of the American Standard Plow Bolts, B18.9-1950, submitted by the sponsors of project B18, was approved by ASA on February 12, 1958.

Subcommittee 9 was merged into Subcommittee 5 in 1977, and Subcommittee 5 was merged into Subcommittee 2 in December 1986. Committee B18 agreed the designations of the Subcommittee 2, 5, and 9 documents should not be changed, since such changes would adversely affect current references to these standards.

A proposed update revision of this Standard was circulated for letter ballot of Subcommittee 2 and Committee B18 on October 19, 1995. Following approval by Subcommittee 2 and Committee B18, this revision was approved by the secretariat and submitted to ANSI for approval as an American National Standard. This was granted on May 7, 1996.

ASME B18.9-2007 was approved as an American National Standard on March 7, 2007.

In early 2011, the B18 Committee received a request from a domestic bolt producer to modify some of the nonfunctional dimensions on the plow bolt design in Tables 1, 2, and 3 to help increase the life of the cold heading tooling used to manufacture these parts. B18 members contacted the major users of plow bolts and it was determined that the requested changes would not adversely affect the function of these bolts. Based on the user feedback, the B18 Committee undertook a complete revision of B18.9.

In addition to the requested changes made to Tables 1, 2, and 3, two more tables were added to the Standard to cover clipped head plow bolts and elliptical head plow bolts that were not previously covered. Plow bolts made to B18.9-2007 according to Tables, 1, 2, and 3 that conformed to those requirements will also conform to this revision. The format and references cited in the Standard were also brought into alignment with other recently revised B18 standards.

Suggestions for improvement of this Standard are welcome. They should be addressed to the Secretary, ASME B18 Standards Committee, The American Society of Mechanical Engineers, Three Park Ave., New York, NY 10016-5990.

This revision was approved as an American National Standard on June 19, 2012.

ASME B18 COMMITTEE

Standardization of Bolts, Nuts, Rivets, Screws, Washers, and Similar Fasteners

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

J. Greenslade, *Chair*
D. S. George, *Vice Chair*
R. D. Strong, *Vice Chair*
C. J. Gomez, *Secretary*

STANDARDS COMMITTEE PERSONNEL

V. Cartina , Autocraft Industrial	M. D. Prasad , <i>Contributing Member</i> , Global M & F Solutions, Inc.
D. A. Clever , <i>Contributing Member</i> , Consultant	S. Savoji , <i>Contributing Member</i> , ITW Medalist
A. P. Cockman , Ford Motor Co.	Q. M. Smith III , Oregon DOT
C. D. de la Garza , TSP, Inc.	D. J. Soccia , General Dynamics Electric Boat Corp.
D. S. George , Ramco Specialties	W. R. Stevens , Ramco
C. J. Gomez , The American Society of Mechanical Engineers	R. D. Strong , Doerken Corp.
J. Greenslade , Industrial Fasteners Institute	S. W. Vass , <i>Contributing Member</i> , Consultant
J. J. Grey , <i>Contributing Member</i> , Fastener Consulting Services, Inc.	C. B. Wackrow , MNP Corp.
A. Herskovitz , <i>Contributing Member</i> , Consultant	W. K. Wilcox , Consultant
J. Hubbard , Leland-Powell Fasteners, Inc.	C. B. Williamson , Fastenal Co.
J. Jennings , <i>Contributing Member</i> , Naval Surface Warfare Center	C. J. Wilson , Consultant
W. H. King , Porteous Fastener Co.	J. G. Zeratsky , <i>Contributing Member</i> , National Rivet and Manufacturing Co.

SUBCOMMITTEE 2 — EXTERNALLY DRIVEN FASTENERS

J. Greenslade , <i>Chair</i> , Industrial Fasteners Institute	R. Leemans , John Deere
C. B. Williamson , <i>Vice Chair</i> , Fastenal Co.	J. F. McCarrick , Defense Supply Center Philadelphia
T. Anderson , Bay Bolt	R. B. Meade , Atrona Material testing Laboratories, Inc.
V. Cartina , Autocraft Industrial	S. Savoji , ITW Medalist
L. Claus , ATF, Inc.	R. M. Serabin , Freundlich Supply Co.
A. P. Cockman , Ford Motor Co.	D. F. Sharp , GMS Structural Engineers
C. D. de la Garza , TSP, Inc.	G. M. Simpson , Semblex Corp.
B. A. Dusina , Federal Screw Works	Q. M. Smith III , Oregon DOT
M. A. Elmi , Consultant	D. J. Soccia , General Dynamics Electric Boat Corp.
J. S. Foote , Trade Association Management, Inc.	W. R. Stevens , Ramco
M. C. Friel , Hayden Bolts, Inc.	J. J. Stoczanskyj , Beacon Fasteners and Components, Inc.
D. S. George , Ramco Specialties	R. D. Strong , Doerken Corp.
A. Herskovitz , Consultant	R. L. Tennis , Consultant
M. W. Holubecki , Electric Boat Corp.	S. W. Vass , Consultant
J. Hubbard , Leland-Powell Fasteners, Inc.	C. B. Wackrow , MNP Corp.
J. Jennings , <i>Contributing Member</i> , Naval Surface Warfare Center	W. K. Wilcox , Consultant
W. H. King , Porteous Fastener Co.	C. J. Wilson , Consultant

CORRESPONDENCE WITH THE B18 COMMITTEE

General. ASME Standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions, and attending Committee meetings. Correspondence should be addressed to:

Secretary, B18 Standards Committee
The American Society of Mechanical Engineers
Three Park Avenue
New York, NY 10016-5990
<http://go.asme.org/Inquiry>

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Proposing a Case. Cases may be issued for the purpose of providing alternative rules when justified, to permit early implementation of an approved revision when the need is urgent, or to provide rules not covered by existing provisions. Cases are effective immediately upon ASME approval and shall be posted on the ASME Committee Web page.

Requests for Cases shall provide a Statement of Need and Background Information. The request should identify the standard, the paragraph, figure or table number(s), and be written as a Question and Reply in the same format as existing Cases. Requests for Cases should also indicate the applicable edition(s) of the standard to which the proposed Case applies.

Interpretations. Upon request, the B18 Standards Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B18 Standards Committee.

The request for an interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his/her request in the following format:

Subject:	Cite the applicable paragraph number(s) and the topic of the inquiry.
Edition:	Cite the applicable edition of the Standard for which the interpretation is being requested.
Question:	Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings that are necessary to explain the question; however, they should not contain proprietary names or information.

Requests that are not in this format may be rewritten in the appropriate format by the Committee prior to being answered, which may inadvertently change the intent of the original request.

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not "approve," "certify," "rate," or "endorse" any item, construction, proprietary device, or activity.

Attending Committee Meetings. The B18 Standards Committee regularly holds meetings, which are open to the public. Persons wishing to attend any meeting should contact the Secretary of the B18 Standards Committee.

INTENTIONALLY LEFT BLANK

PLOW BOLTS

1 INTRODUCTION

1.1 Scope

1.1.1 This Standard covers general and dimensional data for inch series plow bolts recognized as American National Standard.

1.1.2 The inclusion of dimensional data in this Standard is not intended to imply that all of the products described are stock production items. Consumers should consult with suppliers concerning the availability of products.

1.2 Head Types

1.2.1 This Standard recommends No. 3 head (round countersunk head square neck) plow bolts in Table 1 and No. 7 head (round countersunk reverse key head) plow bolts in Table 2 for new designs. It includes No. 3 repair head (round countersunk head square neck) plow bolts in Table 1, No. 4 repair head (square countersunk head) plow bolts in Table 3, No. 6 repair head (round countersunk heavy key head) plow bolts in Table 4, and No. 7 repair head (round countersunk reverse key head) plow bolts in Table 2 for service purposes.

1.2.2 Nonmandatory Appendix A provides dimensions of No. 4 regular head (square countersunk head) plow bolts in Table A-1, and No. 6 regular head (round countersunk heavy key head) plow bolts in Table A-2 as supplementary information, but not as part of this Standard.

1.3 Referenced Standards

The following is a list of publications referenced in this Standard. Unless otherwise specified, the referenced standard shall be the most recent issue at the time of order placement.

ASME B1.1, Unified Inch Screw Threads (UN and UNR Thread Form)
 ASME B1.2, Gages and Gaging for Unified Inch Screw Threads
 ASME B1.3, Screw Thread Gaging Systems for Dimensional Acceptability — Inch and Metric Screw Threads (UN, UNR, UNJ, M, and MJ)
 ASME B18.12, Glossary of Terms for Mechanical Fasteners
 ASME B18.18, Quality Assurance for Fasteners

ASME B18.24, Part Identifying Number (PIN) Code System Standard for B18 Fastener Products
 ASME Y14.5M, Dimensioning and Tolerancing
 Publisher: The American Society of Mechanical Engineers (ASME), Three Park Avenue, New York, NY 10016-5990; Order Department: 22 Law Drive, P.O. Box 2900, Fairfield, NJ 07007-2900 (www.asme.org)

ASTM A307, Carbon Steel Bolts and Studs, 60,000 psi Tensile Strength
 ASTM F468, Nonferrous Bolts, Hex Cap Screws, and Studs for General Use
 ASTM F593, Stainless Steel Bolts, Hex Cap Screws and Studs
 ASTM F788/F788M, Surface Discontinuities of Bolts, Screws, and Studs — Inch and Metric Series
 Publisher: ASTM International (ASTM), 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959 (www.astm.org)

SAE J429, Mechanical and Material Requirements of Externally Threaded Fasteners
 Publisher: Society of Automotive Engineers (SAE International), 400 Commonwealth Drive, Warrendale, PA 15096-0001 (www.sae.org)

1.4 Terminology

For definitions of terms relating to fasteners or component features thereof used in this Standard, refer to ASME B18.12.

1.5 Dimensions

All dimensions in this Standard are given in inches and apply before any coating, unless otherwise specified.

Dimensioning and tolerancing in this Standard are in accordance with ASME Y14.5M, except where dimensions less than 1 in. carry a zero to the left of the decimal.

1.6 Part Identifying Number (PIN) Code System

For a recommended part identification numbering (PIN) system, see ASME B18.24.

2 GENERAL DATA

2.1 Body Diameter

2.1.1 Bolt body diameters shall not exceed the maximum specified in the dimensions of Tables 1 through 6.

2.1.2 Unless otherwise specified in the order by the purchaser, bolts that are not threaded full length shall be furnished with full diameter body within the limits specified in the dimensions tables.

On bolts that are threaded full length, the diameter of the unthreaded length under the head or neck shall not be less than the minimum pitch diameter of the thread.

2.1.3 Bolts may be obtained with reduced diameter body. Where reduced diameter body is specified, the body diameter shall be neither less than the minimum pitch diameter of the thread nor greater than the minimum major diameter of the thread.

2.2 Length

2.2.1 The length of a plow bolt is the overall distance from the end of the bolt to the top of the head. The recommended lengths of plow bolts are given in Table 7.

2.2.2 Tolerances on length of bolts are specified in Table 8.

2.3 Threads

2.3.1 Thread Series and Class. Threads shall be Unified Coarse (UNC or UNRC Series), Class 2A, in accordance with ASME B1.1. Threads without any surface plating or coating will be accepted using the high and low limits of the applicable 2A thread gage (GO/NO GO). Coated or plated threads will be acceptable using the 3A high limit (GO) and 2A low limit (NO GO) gages for the applicable thread size.

2.3.2 Thread Gaging. Unless otherwise specified, dimensional acceptance of screw threads shall be determined by using System 21 of ASME B1.3.

2.4 Thread Length

The thread length is measured from the end of the bolt to the last complete (full form) thread. The minimum thread lengths are specified in Table 7. Tolerances on thread length are specified in Table 9.

2.5 Points

Plow bolts are not ordinarily pointed. If pointed, the point shall be chamfered or rounded at the manufacturer's option from approximately 0.016 in. below the minor diameter of the thread. The first full-formed thread at major diameter shall begin at a point no greater than two times the thread pitch from the end of the bolt, as determined by the distance the point enters into a

cylindrical NO GO major diameter ring gage (see para. 3.1 in ASME B1.2).

2.6 Material and Mechanical Properties

2.6.1 Steel. Unless otherwise specified, chemical and mechanical properties of steel bolts shall conform to Grade A of ASTM A307 or Grade 1, Grade 5, or Grade 8 of SAE J429 as specified by the purchaser.

Cold-headed steel bolts of nonheat-treated grades shall be stress relieved.

2.6.2 Other Materials. Nonferrous materials are covered in ASTM F468. Corrosion-resistant steels are covered in ASTM F593.

2.7 Identification Symbols

2.7.1 Grade Symbols. Each of the products included in this Standard shall be marked in accordance with the requirements of the applicable specification for its material and mechanical properties.

2.7.2 Source Symbols. Each of the products included in this Standard shall be marked to identify its source (manufacturer or private label distributor) in accordance with the requirements of the applicable specification for its material and mechanical properties.

2.8 Workmanship

Bolts shall be free from surface imperfections, such as burrs, seams, laps, loose scale, and other surface irregularities that could affect their serviceability.

When control of surface discontinuities is required, the purchaser shall specify conformance to ASTM F788/F788M.

2.9 Finish

Unless otherwise specified, plow bolts shall be furnished with a natural (as processed) finish, without coating or plating.

2.10 Inspection and Quality Assurance


Unless otherwise specified, acceptability of bolts shall be determined according to ASME B18.18.

2.11 Designation

Plow bolts shall be designated by the product name, including regular or repair head, and ASME B18.9, the nominal size (diameter and length in fractional or decimal inches), the grade or material, and any required protective coating.

EXAMPLE: No. 3 head plow bolt ASME B18.9 – .500 × 1.50 – SAE J429 Grade 5 – Plated ASTM F1941 Fe/Zn 5C

Table 1 Dimensions of No. 3 Head Plow Bolts (Round, Countersunk, Square Neck)

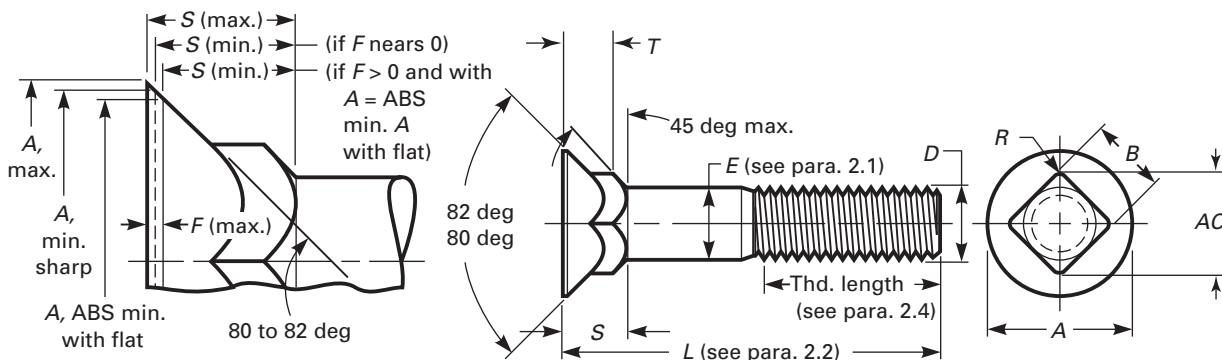


Nominal or Basic Bolt Diameter, <i>D</i>	Diameter of Full-Size Body, <i>E</i>		Diameter of Head, <i>A</i>				Maximum Feed Thickness, <i>F</i>	Depth of Square and Head, <i>S</i>		Minimum Square Corner Length, <i>T</i>	Width of Square, <i>B</i>		Minimum Across Corners, <i>AC</i>	Maximum Radius on Corners of Square, <i>R</i> [Note (1)]
	Max.	Min.	Max.	Min. Sharp	ABS Min. With Flat	Max.		Min.	Max.		(Basic) Min.			
Regular Head														
5/16	0.3125	0.312	0.299	0.605	0.578	0.538	0.040	0.269	0.228	0.176	0.325	0.313	0.417	0.031
3/8	0.3750	0.375	0.360	0.708	0.671	0.624	0.050	0.312	0.262	0.206	0.387	0.375	0.491	0.047
7/16	0.4375	0.438	0.421	0.826	0.781	0.729	0.058	0.364	0.306	0.235	0.450	0.438	0.580	0.047
1/2	0.5000	0.500	0.483	0.945	0.890	0.831	0.068	0.417	0.349	0.265	0.515	0.500	0.668	0.047
9/16	0.5625	0.592	0.544	1.045	1.000	0.924	0.072	0.461	0.389	0.305	0.578	0.563	0.732	0.078
[Note (2)]	[Note (2)]													
5/8	0.6250	0.657	0.606	1.147	1.094	1.013	0.080	0.506	0.426	0.330	0.640	0.625	0.819	0.078
3/4	0.7500	0.782	0.729	1.303	1.250	1.169	0.080	0.541	0.461	0.338	0.765	0.750	0.996	0.078
7/8	0.8750	0.938	0.853	1.512	1.469	1.344	0.100	0.626	0.526	0.384	0.906	0.875	1.160	0.094
1	1.0000	1.062	0.976	1.700	1.656	1.532	0.100	0.690	0.590	0.422	1.031	1.000	1.336	0.094
Repair Head [Note (3)]														
5/16	0.3125	0.312	0.299	0.556	0.531	0.496	0.032	0.232	0.200	0.139	0.325	0.313	0.417	0.031
3/8	0.3750	0.375	0.360	0.659	0.624	0.584	0.040	0.272	0.232	0.166	0.387	0.375	0.491	0.047
7/16	0.4375	0.438	0.421	0.779	0.734	0.689	0.048	0.324	0.276	0.195	0.450	0.438	0.580	0.047
1/2	0.5000	0.500	0.483	0.898	0.843	0.793	0.056	0.375	0.319	0.223	0.515	0.500	0.668	0.047
9/16	0.5625	0.592	0.544	1.002	0.953	0.882	0.064	0.423	0.359	0.267	0.578	0.563	0.732	0.078
5/8	0.6250	0.657	0.606	1.096	1.047	0.976	0.064	0.458	0.394	0.282	0.640	0.625	0.819	0.078
3/4	0.7500	0.782	0.729	1.252	1.203	1.132	0.064	0.493	0.429	0.290	0.765	0.750	0.996	0.078
7/8	0.8750	0.938	0.853	1.465	1.422	1.309	0.080	0.573	0.493	0.331	0.906	0.875	1.160	0.094
1	1.0000	1.062	0.976	1.653	1.609	1.497	0.080	0.637	0.557	0.369	1.031	1.000	1.336	0.094

NOTES:

- (1) If the method of manufacture permits, it is recommended that the same radius be maintained on each of all four corners of the square.
- (2) This size is not recommended.
- (3) The letter "R" shall be shown on the top of the repair head to distinguish it from the regular head bolt.

Table 2 Dimensions of No. 7 Head Plow Bolts (Round, Countersunk, Reverse Key)

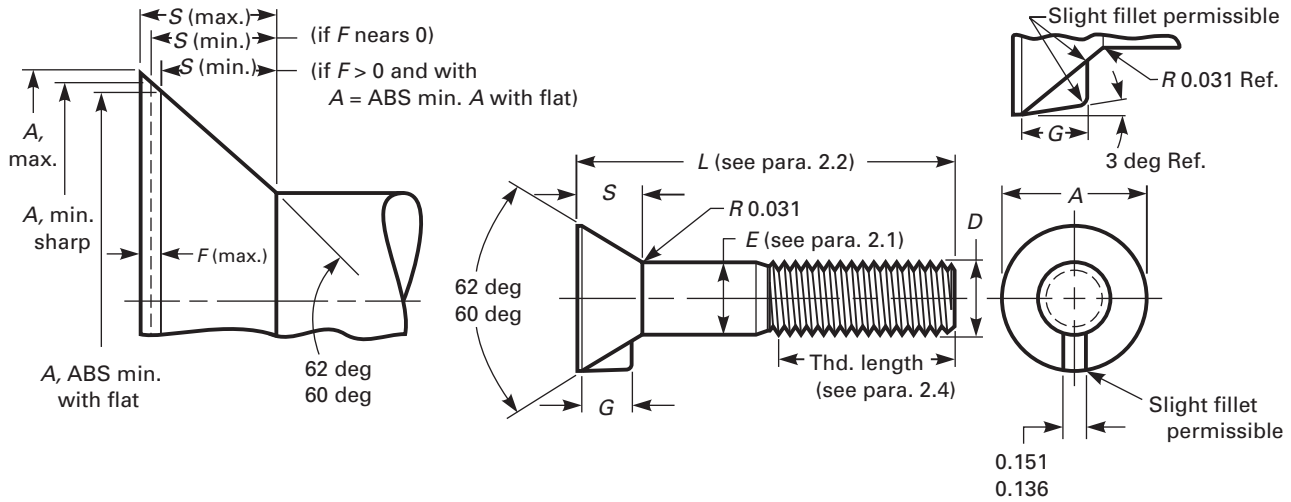


Nominal or Basic Bolt Diameter, <i>D</i>	Diameter of Full-Size Body, <i>E</i>		Diameter of Head, <i>A</i>			Maximum Feed Thickness, <i>F</i>	Head Height, <i>S</i>		Key Length, <i>G</i>		
	Max.	Min.	Max.	Min. Sharp	ABS Min. With Flat		Max.	Min.	Min.	Max.	
Regular Head											
$\frac{5}{16}$	0.3125	0.312	0.299	0.592	0.578	0.546	0.040	0.233	0.208	0.185	0.200
$\frac{3}{8}$	0.3750	0.375	0.360	0.661	0.640	0.603	0.050	0.239	0.208	0.187	0.202
$\frac{7}{16}$	0.4375	0.438	0.421	0.776	0.749	0.709	0.058	0.282	0.246	0.227	0.242
$\frac{1}{2}$	0.5000	0.500	0.483	0.892	0.859	0.814	0.068	0.328	0.286	0.267	0.282
$\frac{9}{16}$	0.5625	0.592	0.544	1.021	0.984	0.938	0.072	0.383	0.338	0.321	0.336
[Note (1)]	[Note (1)]										
$\frac{5}{8}$	0.6250	0.657	0.606	1.121	1.078	1.028	0.080	0.414	0.364	0.348	0.363
$\frac{3}{4}$	0.7500	0.782	0.729	1.277	1.234	1.184	0.080	0.440	0.390	0.375	0.390
Repair Head [Note (2)]											
$\frac{5}{16}$	0.3125	0.312	0.299	0.554	0.546	0.517	0.032	0.201	0.181	0.158	0.173
$\frac{3}{8}$	0.3750	0.375	0.360	0.623	0.609	0.577	0.040	0.207	0.182	0.158	0.173
$\frac{7}{16}$	0.4375	0.438	0.421	0.738	0.718	0.682	0.048	0.250	0.220	0.199	0.214
$\frac{1}{2}$	0.5000	0.500	0.483	0.853	0.828	0.789	0.056	0.295	0.260	0.239	0.254
$\frac{9}{16}$	0.5625	0.592	0.544	0.984	0.953	0.910	0.064	0.352	0.312	0.293	0.308
[Note (1)]	[Note (1)]										
$\frac{5}{8}$	0.6250	0.657	0.606	1.077	1.046	1.003	0.064	0.378	0.338	0.321	0.336
$\frac{3}{4}$	0.7500	0.782	0.729	1.234	1.203	1.160	0.064	0.404	0.364	0.347	0.362

NOTES:


- (1) This size is not recommended.
- (2) The letter "R" shall be shown on the top of the repair head to distinguish it from the regular head bolt.

**Table 3 Dimensions of No. 4 Repair Head Plow Bolts
(Square Head, Countersunk)**

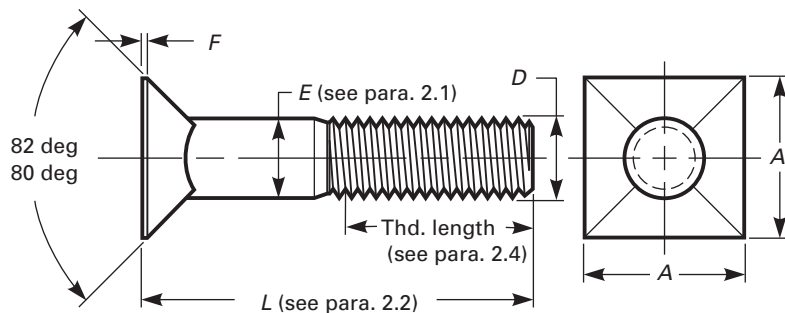


Nominal or Basic Bolt Diameter, D		Diameter of Full-Size Body, E		Width of Head, A			Maximum Feed Thickness, F
		Max.	Min.	Min. (Basic)	Min.	Max.	
$\frac{5}{16}$	0.3125	0.312	0.299	$\frac{33}{64}$	0.482	0.531	0.040
$\frac{3}{8}$	0.3750	0.375	0.360	$\frac{41}{64}$	0.599	0.656	0.050
$\frac{7}{16}$	0.4375	0.438	0.421	$\frac{45}{64}$	0.653	0.718	0.060
$\frac{1}{2}$	0.5000	0.500	0.438	$\frac{49}{64}$	0.707	0.781	0.070
$\frac{9}{16}$	0.5625	0.592	0.544	$\frac{57}{64}$	0.824	0.922	0.080
$\frac{5}{8}$	0.6250	0.657	0.606	$\frac{61}{64}$	0.886	0.984	0.080
$\frac{3}{4}$	0.7500	0.782	0.729	$1\frac{5}{64}$	1.011	1.109	0.080
$\frac{7}{8}$	0.8750	0.938	0.853	$1\frac{17}{64}$	1.199	1.297	0.080
1	1.0000	1.062	0.976	$1\frac{29}{64}$	1.386	1.484	0.080

Table 4 Dimensions of No. 6 Repair Head Plow Bolts (Round, Countersunk, Heavy Key)

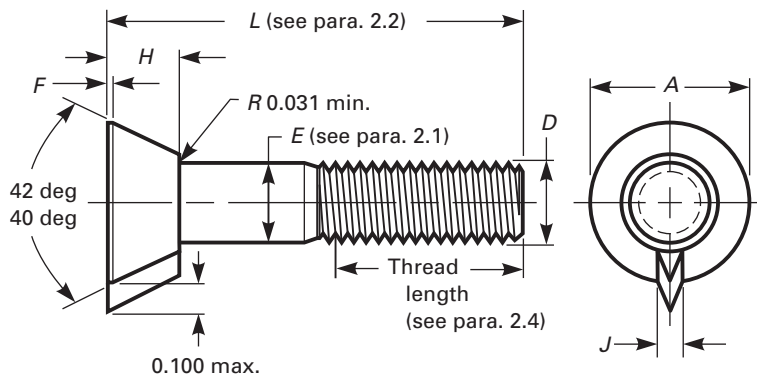


Nominal or Basic Bolt Diameter, <i>D</i>	Diameter of Full-Size Body, <i>E</i>		Diameter of Head, <i>A</i>		Maximum Feed Thickness, <i>F</i>	Maximum Height of Head, <i>H</i>	Maximum Key Width, <i>J</i>	
	Max.	Min.	Min. (Basic)	Max.				
3/8	0.3750	0.375	0.360	0.708	0.723	0.025	0.286	0.156
7/16	0.4375	0.438	0.421	0.770	0.785	0.030	0.339	0.172
1/2	0.5000	0.500	0.483	0.836	0.851	0.035	0.402	0.188

Table 5 Clipped Head Plow Bolt

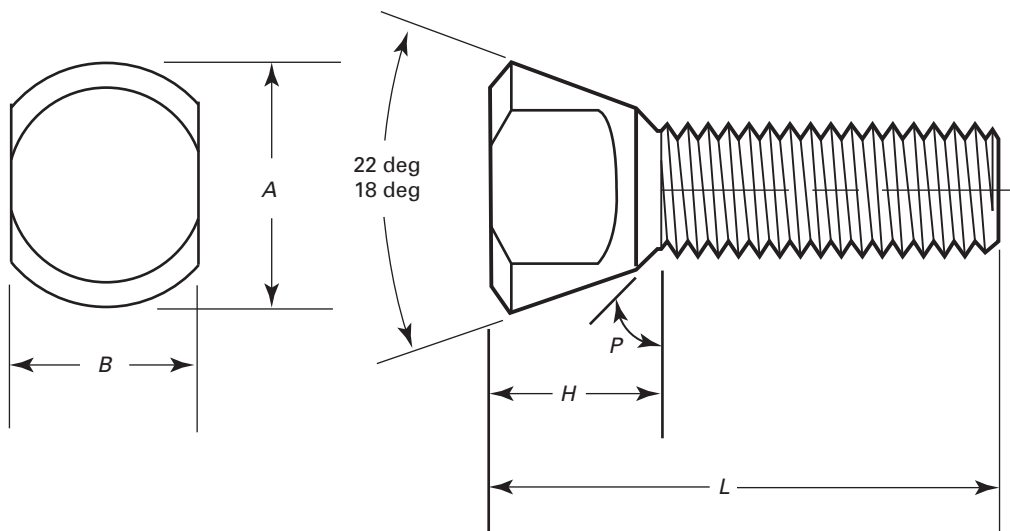

Nominal or Basic Bolt Diameter	Diameter of Head, <i>A</i>		Width Across Clipped Flats, <i>B</i>		Height of Head, <i>H</i>		Maximum Angle of Transition, <i>P</i> , deg	
	Max.	Min.	Max.	Min.	Max.	Min.		
3/8	0.3750	0.565	0.535	0.470	0.445	0.350	0.335	45
7/16	0.4375	0.605	0.595	0.540	0.530	0.391	0.359	45
1/2	0.5000	0.680	0.670	0.580	0.570	0.391	0.359	40

Table 6 Elliptical Head Plow Bolt

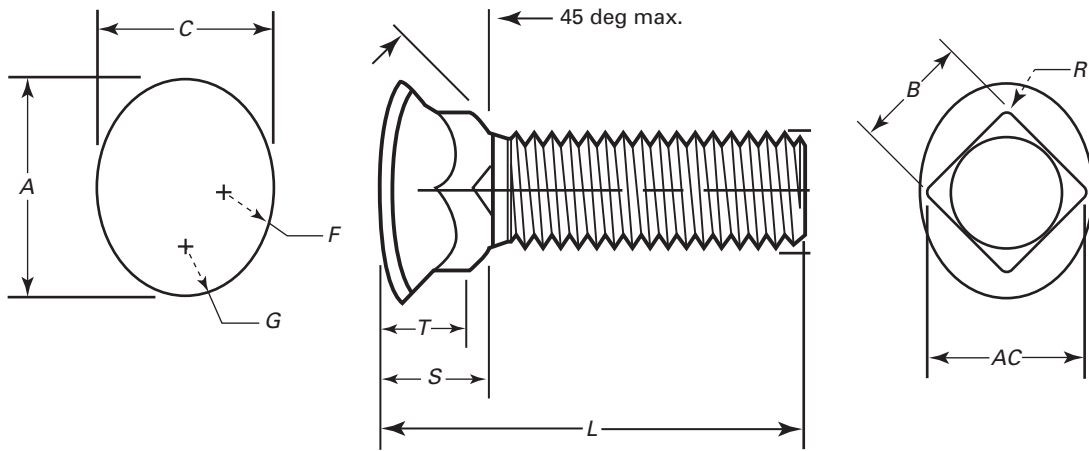

Nominal or Basic Bolt Diameter	Elongated Head Dimension, <i>A</i>		Narrow Head Dimension, <i>C</i>		Large Radius of Head, <i>F</i> , Ref	Small Radius of Head, <i>G</i> , Ref	Width of Square, <i>B</i>		Minimum Across Corners, <i>AC</i>	Depth of Square, <i>S</i>		Minimum Square Corner Length, <i>T</i>	Maximum Radius on Corners of Square, <i>R</i>	
	Max.	Min.	Max.	Min.			Max.	Min.		Max.	Min.			
$\frac{3}{8}$	0.3750	0.630	0.600	0.710	0.670	0.375	0.250	0.387	0.375	0.491	0.330	0.300	0.244	0.047
$\frac{7}{16}$	0.4375	0.733	0.703	0.820	0.780	0.438	0.312	0.451	0.437	0.580	0.420	0.380	0.309	0.047

Table 7 Minimum Thread Lengths of Plow Bolts ($2D + 0.25$)

Recommended Bolt Length, L [Note (1)]	Nominal Bolt Diameter, D									
	$\frac{5}{16}$ 0.3125	$\frac{3}{8}$ 0.375	$\frac{7}{16}$ 0.4375	$\frac{1}{2}$ 0.500	$\frac{9}{16}$ 0.5625 [Note (2)]	$\frac{5}{8}$ 0.625	$\frac{3}{4}$ 0.750	$\frac{7}{8}$ 0.875	1 1.000	
$\frac{3}{4}$	0.75	T to H	T to H	T to H	T to H	T to H	T to H	T to H	T to H	T to H
1	1.00	T to H	T to H	T to H	T to H	T to H	T to H	T to H	T to H	T to H
$1\frac{1}{4}$	1.25	0.875	T to H	T to H	T to H	T to H	T to H	T to H	T to H	T to H
$1\frac{1}{2}$	1.50	0.875	1.000	T to H	T to H	T to H	T to H	T to H	T to H	T to H
$1\frac{3}{4}$	1.75	0.875	1.000	1.125	1.250	T to H	T to H	T to H	T to H	T to H
2	2.00	0.875	1.000	1.125	1.250	1.375	T to H	T to H	T to H	T to H
$2\frac{1}{4}$	2.25	0.875	1.000	1.125	1.250	1.375	1.500	T to H	T to H	T to H
$2\frac{1}{2}$	2.50	0.875	1.000	1.125	1.250	1.375	1.500	1.750	T to H	T to H
$2\frac{3}{4}$	2.75	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	T to H
3	3.00	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$3\frac{1}{4}$	3.25	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$3\frac{1}{2}$	3.50	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$3\frac{3}{4}$	3.75	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
4	4.00	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$4\frac{1}{4}$	4.25	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$4\frac{1}{2}$	4.50	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$4\frac{3}{4}$	4.75	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
5	5.00	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$5\frac{1}{4}$	5.25	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$5\frac{1}{2}$	5.50	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
$5\frac{3}{4}$	5.75	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250
6	6.00	0.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000	2.250

GENERAL NOTE: T to H : threaded to head or square within $2\frac{1}{2}$ full threads.

NOTES:

- (1) Short lengths shown above the solid stepped line are not recommended.
(2) This size is not recommended for regular head bolts.

Table 8 Tolerance on Length

Nominal Diam. $\frac{1}{4}$ Through $\frac{3}{8}$ 0.250 Through 0.375	Nominal Diam. $\frac{7}{16}$ and $\frac{1}{2}$ 0.4375 and 0.500	Nominal Diam. $\frac{9}{16}$ Through 1 0.5625 Through 1.000
± 0.03	± 0.06	± 0.12


Table 9 Plus Tolerance on Thread Length

Nominal Diameter, D	Tolerance Plus
$\frac{5}{16}$	0.3125
$\frac{3}{8}$	0.3750
$\frac{7}{16}$	0.4375
$\frac{1}{2}$	0.5000
$\frac{9}{16}$	0.5625
$\frac{5}{8}$	0.6250
$\frac{3}{4}$	0.7500
$\frac{7}{8}$	0.8750
1	1.0000

NONMANDATORY APPENDIX A DIMENSIONS OF OBSOLETE PLOW BOLTS


Nonmandatory Appendix A shows the dimensions in Table A-1 for No. 4 and Table A-2 for No. 6 regular head plow bolts as supplementary information and not as part of this Standard. For new designs, it is recommended that preference be given to Table 1, No. 3 or Table 2, No. 7 head plow bolts.

**Table A-1 Dimensions of No. 4 Regular Head Plow Bolts
(Square Head, Countersunk)**

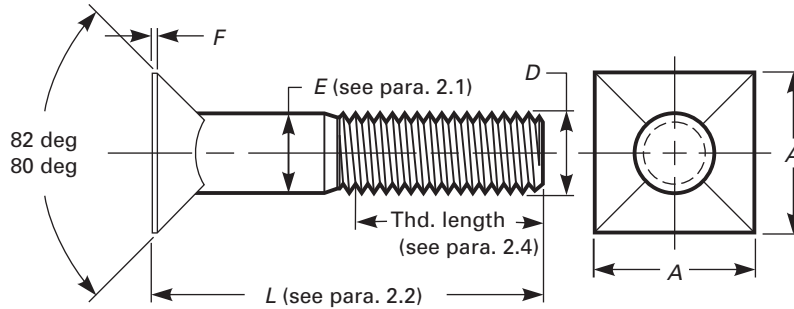

Nominal or Basic Bolt Diameter, D		Diameter of Full-Size Body, E		Width of Head, A			Maximum Feed Thickness, F
		Max.	Min.	Min. (Basic)	Min.	Max.	
$\frac{5}{16}$	0.3125	0.312	0.299	$\frac{9}{16}$	0.563	0.578	0.025
$\frac{3}{8}$	0.3750	0.375	0.360	$1\frac{1}{16}$	0.688	0.703	0.031
$\frac{7}{16}$	0.4375	0.438	0.421	$\frac{3}{4}$	0.750	0.765	0.036
$\frac{1}{2}$	0.5000	0.500	0.438	$\frac{13}{16}$	0.813	0.828	0.042
$\frac{9}{16}$	0.5625	0.592	0.544	$\frac{15}{16}$	0.938	0.969	0.045
$\frac{5}{8}$	0.6250	0.657	0.606	1	1.000	1.031	0.050
$\frac{3}{4}$	0.7500	0.782	0.729	$1\frac{1}{8}$	1.125	1.156	0.050
$\frac{7}{8}$	0.8750	0.938	0.853	$1\frac{5}{16}$	1.313	1.344	0.050
1	1.0000	1.062	0.976	$1\frac{1}{2}$	1.500	1.531	0.050

**Table A-2 Dimensions of No. 6 Regular Head Plow Bolts
(Round, Countersunk, Heavy Key)**

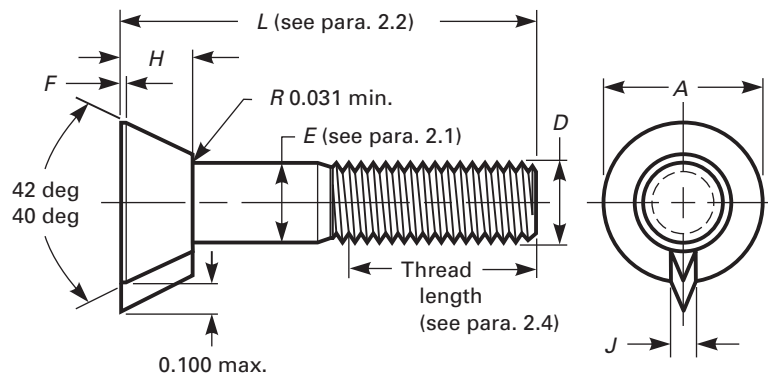

Nominal or Basic Bolt Diameter, D	Diameter of Full-Size Body, E	Diameter of Full-Size Body, E		Diameter of Head, A		Maximum Height of Head, H	Maximum Key Width, J
		Max.	Min.	Min. (Basic)	Max.		
$\frac{3}{8}$	0.3750	0.375	0.360	0.725	0.740	0.310	0.156
$\frac{7}{16}$	0.4375	0.438	0.421	0.796	0.811	0.367	0.172
$\frac{1}{2}$	0.5000	0.500	0.483	0.867	0.882	0.430	0.188

B18 AMERICAN NATIONAL STANDARDS FOR BOLTS, NUTS, RIVETS, SCREWS, WASHERS, AND SIMILAR FASTENERS

Small Solid Rivets	B18.1.1-1972 (R2011)
Large Rivets	B18.1.2-1972 (R2011)
Metric Small Solid Rivets	B18.1.3M-1983 (R2011)
Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)	B18.2.1-2010
Nuts for General Applications: Machine Screw Nuts, Hex, Square, Hex Flange, and Coupling Nuts (Inch Series)	B18.2.2-2010
Metric Hex Cap Screws	B18.2.3.1M-1999 (R2011)
Metric Formed Hex Screws	B18.2.3.2M-2005
Metric Heavy Hex Screws	B18.2.3.3M-1979 (R2001)
Metric Hex Flange Screws	B18.2.3.4M-2001 (R2011)
Metric Hex Bolts	B18.2.3.5M-1979 (R2011)
Metric Heavy Hex Bolts	B18.2.3.6M-1979 (R2006)
Metric Heavy Hex Flange Screws	B18.2.3.9M-2001 (R2006)
Metric Slotted Hex Nuts	B18.2.4.3M-1979 (R2012)
Metric Flanged 12-Point Head Screws	B18.2.5M-2009
Metric Fasteners for Use in Structural Applications	B18.2.6M-2012
Clearance Holes for Bolt, Screws, and Studs	B18.2.8-1999 (R2010)
Straightness Gage and Gaging for Bolts and Screws	B18.2.9-2010
Socket Cap, Shoulder, and Set Screws, Hex and Spline Keys (Inch Series)	B18.3-2003 (R2008)
Socket Head Cap Screws (Metric Series)	B18.3.1M-1986 (R2008)
Metric Series Hexagon Keys and Bits	B18.3.2M-1979 (R2008)
Hexagon Socket Head Shoulder Screws (Metric Series)	B18.3.3M-1986 (R2008)
Hexagon Socket Button Head Cap Screws (Metric Series)	B18.3.4M-1986 (R2008)
Hexagon Socket Flat Countersunk Head Cap Screws (Metric Series)	B18.3.5M-1986 (R2008)
Metric Series Socket Set Screws	B18.3.6M-1986 (R2008)
Round Head Bolts (Inch Series)	B18.5-2008
Metric Round Head Short Square Neck Bolts	B18.5.2.1M-2006 (R2011)
Metric Round Head Square Neck Bolts	B18.5.2.2M-1982 (R2010)
Wood Screws (Inch Series)	B18.6.1-1981 (R2008)
Slotted Head Cap Screws, Square Head Set Screws, and Slotted Headless Set Screws (Inch Series)	B18.6.2-1998 (R2010)
Machine Screws, Tapping Screws, and Metallic Drive Screws (Inch Series)	B18.6.3-2010
Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws (Inch Series)	B18.6.4-1998 (R2005)
Metric Thread-Forming and Thread-Cutting Tapping Screws	B18.6.5M-2000 (R2010)
Metric Machine Screws	B18.6.7M-1999 (R2010)
Thumb Screws and Wing Screws (Inch Series)	B18.6.8-2010
Wing Nuts (Inch Series)	B18.6.9-2010
General Purpose Semi-Tubular Rivets, Full Tubular Rivets, Split Rivets and Rivet Caps	B18.7-2007
Metric General Purpose Semi-Tubular Rivets	B18.7.1M-2007 (R2012)
Clevis Pins and Cotter Pins (Inch Series)	B18.8.1-1994 (R2010)
Taper Pins, Dowel Pins, Straight Pins, Grooved Pins, and Spring Pins (Inch Series)	B18.8.2-2000 (R2010)
Spring Pins: Coiled Type, Spring Pins: Slotted, Machine Dowel Pins: Hardened Ground, and Grooved Pins (Metric Series)	B18.8.100M-2000 (R2010)
Cotter Pins, Headless Clevis Pins, and Headed Clevis Pins (Metric Series)	B18.8.200M-2000 (R2010)
Plow Bolts	B18.9-2012
Track Bolts and Nuts	B18.10-2006 (R2011)
Miniature Screws	B18.11-1961 (R2010)
Glossary of Terms for Mechanical Fasteners	B18.12-2012
Screw and Washer Assemblies — Sems (Inch Series)	B18.13-1996 (R2008)
Screw and Washer Assemblies: SEMS (Metric Series)	B18.13.1M-2011
Forged Eyebolts	B18.15-1985 (R2008)
Prevailing-Torque Type Steel Metric Hex Nuts and Hex Flange Nuts	B18.16M-2004 (R2009)
Serrated Hex Flange Locknuts 90,000 psi (Inch Series)	B18.16.4-2008
Nylon Insert Locknuts (Inch Series)	B18.16.6-2008
Quality Assurance for Fasteners	B18.18-2011
Inspection and Quality Assurance for General Purpose Fasteners	B18.18.1-2007

Inspection and Quality Assurance for High-Volume Machine Assembly Fasteners	B18.18.2-2009
Inspection and Quality Assurance for Special Purpose Fasteners	B18.18.3M-1987 (R2005)
Inspection and Quality Assurance for Fasteners for Highly Specialized Engineered Applications	B18.18.4M-1987 (R2005)
Inspection and Quality Assurance Plan Requiring In-Process Inspection and Controls.....	B18.18.5M-1998 (R2009)
Quality Assurance Plan for Fasteners Produced in a Third Party Accreditation System	B18.18.6M-1998 (R2009)
Quality Assurance Plan for Fasteners Produced in a Customer Approved Control Plan	B18.18.7M-1998 (R2009)
Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers (Inch Series).....	B18.21.1-2009
Lock Washers (Metric Series)	B18.21.2M-1999 (R2005)
Double Coil Helical Spring Lock Washers for Wood Structures	B18.21.3-2008
Metric Plain Washers.....	B18.22M-1981 (R2010)
Part Identifying Number (PIN) Code System for B18 Fastener Products	B18.24-2004
Square and Rectangular Keys and Keyways.....	B18.25.1M-1996 (R2008)
Woodruff Keys and Keyways	B18.25.2M-1996 (R2008)
Square and Rectangular Keys and Keyways: Width Tolerances and Deviations Greater Than Basic Size	B18.25.3M-1998 (R2008)
Tapered and Reduced Cross Section Retaining Rings (Inch Series)	B18.27-1998 (R2011)
Helical Coil Screw Thread Inserts — Free Running and Screw Locking (Inch Series).....	B18.29.1-2010
Helical Coil Screw Thread Inserts: Free Running and Screw Locking (Metric Series)	B18.29.2M-2005 (R2010)
Open-End Blind Rivets With Break Mandrels (Metric Series)	B18.30.1M-2000 (R2010)
Metric Continuous and Double-End Studs.....	B18.31.1M-2008
Continuous and Double-End Studs.....	B18.31.2-2008
Threaded Rods (Inch Series).....	B18.31.3-2009
Threaded Rod (Metric Series)	B18.31.4M-2009
Bent Bolts (Inch Series)	B18.31.5-2011

The ASME Publications Catalog shows a complete list of all the Standards published by the Society. For a complimentary catalog, or the latest information about our publications, call 1-800-THE-ASME (1-800-843-2763).

INTENTIONALLY LEFT BLANK

ASME B18.9-2012

ISBN 978-0-7918-3425-1



9 780791 83425 1



L02112